


# DPM STACCATO C2 INSTALLATIONS INSTRUCTIONS

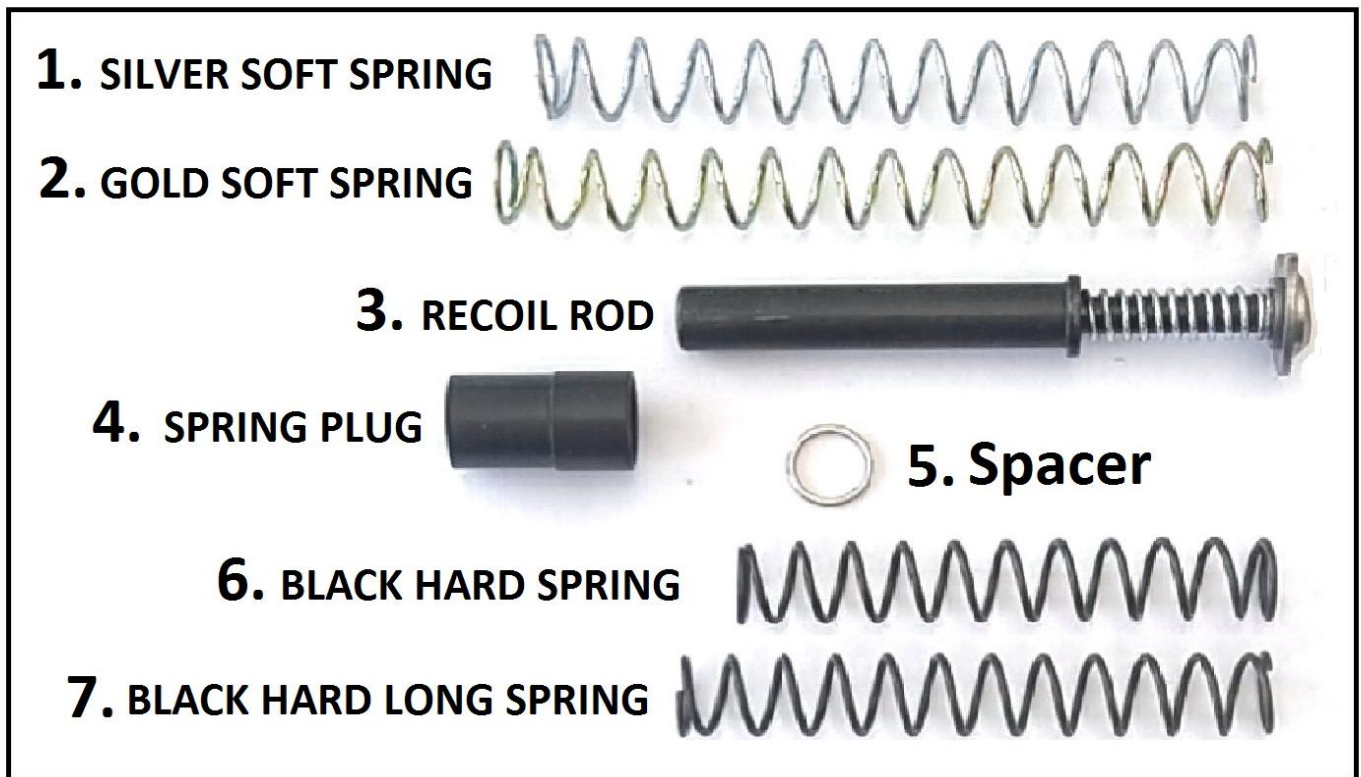

The system includes 1 Bushing, 1 Spacer and 4 different in length and tension External Springs. The DPM Spring Plug must always be installed when the DPM Recoil Rod and springs are used.

The 2 Black Springs (6&7) have wire diameter 1.1mm and are Stronger than the 2 Silver and Gold coated springs (1&2) with wire diameter 1mm.

The Spacer is an optional use and provides +2.5 lb. (approx.) to the Total Force of the Recoil System with any Spring. (See below the Spacer installation Fig2)



**Power Rates Slide on the battery (idle position) approx.:**

Gold Short Spring (1.0mm): 6.2 lb

Silver Long Spring (1.0mm): 7.3 lb

Black Short Spring (1.1mm): 7 lb

Black Long Spring (1.1mm): 8.15 lb

**Total force (Slide full open position) approx. :**

Gold Short Spring (1.0mm): 12 lb

Silver Long Spring (1.0mm): 13.2 lb

Black Short Spring (1.1mm): 14.3 lb

Black Long Spring (1.1mm): 15.4 lb