


# GLOCK 40 Gen4 10mm Installation Instructions

**ATTENTION: When you install or remove the recoil system from the pistol, use always eye protection glasses.**

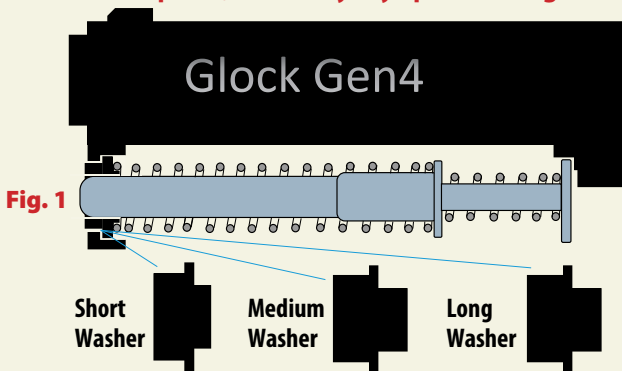

- Fig. 1**
1. Use always **ONLY ONE WASHER** (ring) with the DPM RECOIL ROD.
  2. Install one of the two washers with the big diameter side of the slide hole (**Fig. 1**).
  3. Install the main spring on the recoil rod, compress the recoil rod with the spring to insert the rod in the washer's hole and push to lock on the correct position of the barrel.
  4. Before loading the magazine on the pistol function (open / close) the slide several times to ensure that the DPM Recoil System has been installed correctly and functions unrestricted.

## **Washers & Springs Combinations ( Fig. 1 )**

1. We suggest to use the Short Washer and the Short External Spring when you use 10 mm soft homemade loads.
2. We suggest also to try any possible combination of the External Springs and Plugs to fine tune the pistol function depending on the power of the ammunition that is used and according to your personal standards.
3. Washers are responsible only for the buffer force (slide full open position) and the external springs are responsible only for the slide closed position (slide on the battery).

# Car Glass Breakers

The DPM Systems Technologies Ltd Designed, Developed and Presents two **NEW PRODUCTS** for Tactical and Rescue Use.



1. DPM Floorplate with Carbide Tip. Transform Your Magazine Into Convenient Car Glass Breaker. Tactical & Rescue Use. Professional Effectiveness. Your Glass Breaker is Always Within Reach. A Necessary Tool for Everyone.



**ONLY FOR GLOCK GENERATION 4**

2. DPM Recoil Reduction System in Titanium Version with Carbide Tip for Car Glass Breakage. Extreme Tactical Use. Professional Effectiveness. Your Glass Breaker is Always Ready for Action.

<http://www.dpmsystems.com/car-glass-breakers/>

Copyright © 2020 DPM Systems Technologies Ltd.