



INSTALLATION INSTRUCTIONS TANFOGLIO NEW LIMITED CUSTOM

1. Use always **ONE** of the **DPM SPRING PLUGS** when you use the **DPM Recoil Reduction System**.
2. Before you install the **DPM Rod Insert** one of the **DPM SPRING PLUGS** in the slide (Fig.1).
3. Finally choose one of the **DPM Springs** and insert the **DPM Recoil Rod** in the slide (Fig. 2).

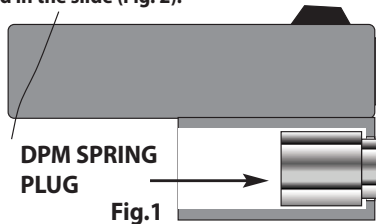

Please read the **POWER COMBINATIONS TABLE** for all the possible combinations given from the three (3) **DPM SPRING PLUGS** and the three (3) **SPRINGS** in cooperation with the **DPM RECOIL ROD**.

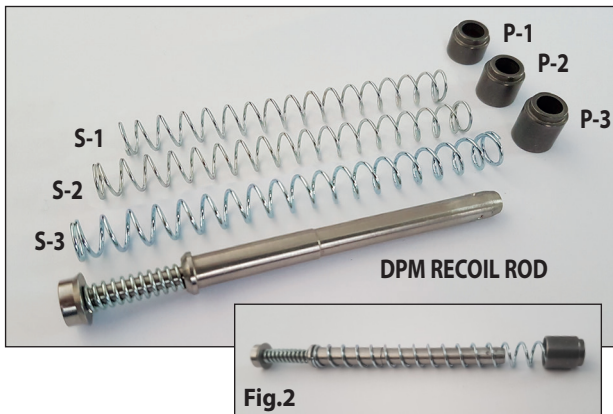

DPM RECOIL SYSTEM - POWER COMBINATIONS TABLE

TANFOGLIO

TANFOGLIO			Power Slide Battery		Power Slide Full Open Position	
			(kgf) Kilogram Force	(lbs) Pound Force	(kgf) Kilogram Force	(lbs) Pound Force
A/A	SPRING	SPRING PLUG				
1	S-1	P-1	2	4.5	6	13
2	S-1	P-2	2.5	5.5	8	17.5
3	S-1	P-3	3	6.5	10	22
4	S-2	P-1	2	4.5	6	13
5	S-2	P-2	2.5	5.5	8	17.5
6	S-2	P-3	3	6.5	10	22
7	S-3	P-1	2	4.5	6	13
8	S-3	P-2	2.5	5.5	8	17.5
9	S-3	P-3	3	6.5	10	22