


# DPM RECOIL SYSTEM- GLOCK 42 43 GEN 4

## Instructions for the installation

**ATTENTION:** When you install or remove the recoil system from the pistol, use always eye protection glasses.

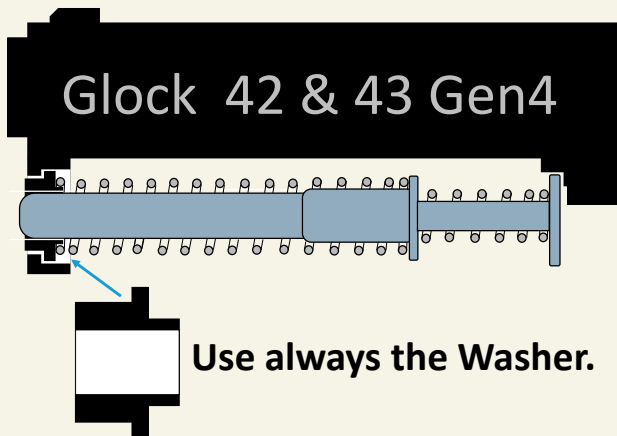

**Use always the Washer.**

**Fig. 1**

1. Use always the WASHER (ring) with the DPM RECOIL ROD.
2. Install the washer with the big diameter side of the slide hole (**Fig. 1**).
3. Install the main spring on the recoil rod, compress the recoil rod with the spring to insert the rod in the washer's hole and push to lock on the correct position of the barrel.
4. Before loading the magazine on the pistol function (open / close) the slide several times to ensure that the DPM Recoil System has been installed correctly and functions unrestricted.