


# INSTALLATION INSTRUCTIONS

## 1911-2011 BULL BARELL




**WARNINGS:** Before proceeding with installation make sure the pistol is unloaded and follow the operating and safety instructions provided by the pistol manufacturer. Remove the Factory Guide Rod according to the pistol manufacturers instructions. **ALWAYS** wear eye protection during installation or removal of this item. Use caution during installation and removal as recoil system is under extreme pressure and may spring out violently if handled incorrectly.

### DPM RECOIL SYSTEM 1911-2011 Components List



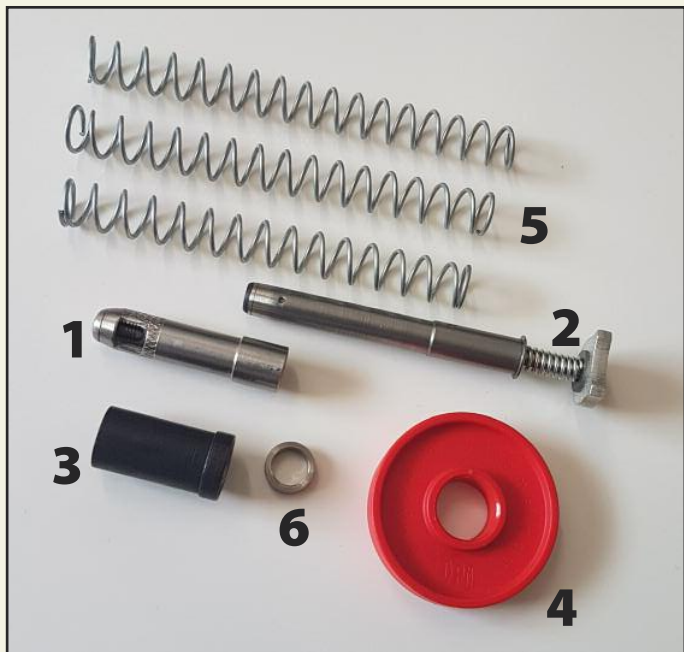


- |                      |                     |                |
|----------------------|---------------------|----------------|
| 1. Installation Tube | 2. Recoil Rod       | 3. Spring Plug |
| 4. Compressive Disc  | 5. External Springs | 6. Ring        |

1. Place One External Spring on the Recoil Rod. FIG. 1
2. Place the Compressive Disc (Part 4) on the DPM Spring Plug (Part 3) FIG. 2. Optionally insert the Ring (Part 6) in the Spring Plug, if you wish the recoil system to have its maximum force. FIG. 3
3. Insert the Recoil Rod with the Spring in the Spring Plug. FIG. 4

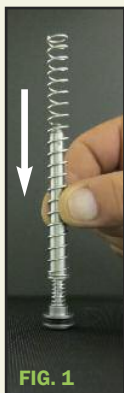

4. Compress the Spring Plug by the Compressive Disc by pushing down. FIG. 5
5. Insert the Installation Tube (Part 1) FIG. 6 and screw the Installation Tube on the Recoil Rod to temporarily hold the Spring Plug in place. FIG. 6a

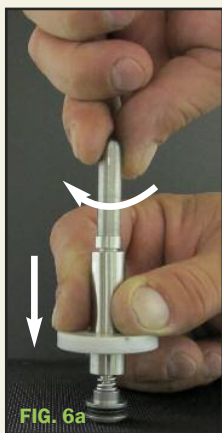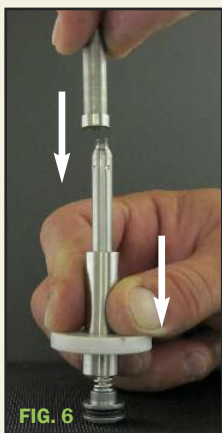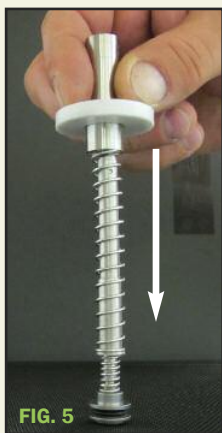



**ATTENTION!** Before the assembling and disassembling on the pistol slide, be sure that the screw inside the tool (FIG. 7) must be completely screwed on the Recoil Rod (FIG. 8).



6. Remove the Compressive Disc. Now the Recoil Rod is ready for installation. FIG. 9



7. Insert the Recoil Rod in the Pistol Slide. FIG. 10

8. Using your thumb, push the DPM Rod forward to compress the Recoil System and Unscrew the Installation Tube while continuing to hold the rod compressed. FIG. 11



- 9. Remove the Installation Tube and slowly and carefully release the rod allowing it to slide back and lock onto the barrel. FIG. 12**



**Assemble the Slide on the Frame and function (open and close) the slide several times by hand to ensure that the DPM Recoil Reduction System operates unrestricted.**

- 10. To Remove the Recoil System, Using your thumb, push the DPM rod forward to compress the recoil System and Screw on the Installation Tube. FIG. 13**



- 11. Follow steps 1 to 5 in reverse order to complete disassembly.**

**DPM Systems Technologies, its affiliates, distributors or resellers are not responsible for damage or injuries sustained during the improper or proper use of this product.**

**For any questions about the installation or operating instructions:  
[service@dpmssystems.com](mailto:service@dpmssystems.com)**